


K 62 (V2) - ALUMINIUM HINGE


Hinge for thick aluminium frame door



Hinge cup




Drilling size




K62 ALUMINIUM HINGE

TECHNICAL SPECIFICATIONS

Open Angle	: 100° ± 5°	Base Adjustment	: -2.5mm/ +2.5mm
Range of aluminium width	: 23 -26mm	Quality Standard	: Grade 3 of EN15570
Range of aluminium thickness	: 22 -28mm	Hinge Arm Material	: Zinc Alloy
Drilling size of hinge cup	: 28mm	Hinge Cup Material	: 1.2mm black nickel plated
Base Adjustment	: -2.5mm/ +2.5mm	Hinge Plate Material	: 1.2mm black nickel plated




		X =						
		23	24	25	26	27	28	
V = 23	A =	0.8	0.9	1.2	1.5	1.8	2.4	
V = 24	A =	0.8	0.9	1.2	1.5	1.8	2.3	
V = 25	A =	0.8	0.9	1.2	1.5	1.8	2.3	
V = 26	A =	0.8	0.9	1.2	1.5	1.7	2.2	

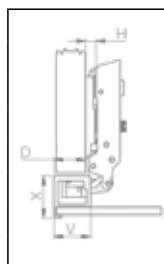

K = Hinge cup distance
T = Door thickness
V (Width of aluminium): 23-26
X (Thickness of aluminium): 22-28

		Door Panel Cover D						
		16	17	18	19	20	21	22
Hinge Cup Distance K	22			0				
	23				0			
	24	4				0		
	25		4				0	
	26			4				0
		Base Height H						

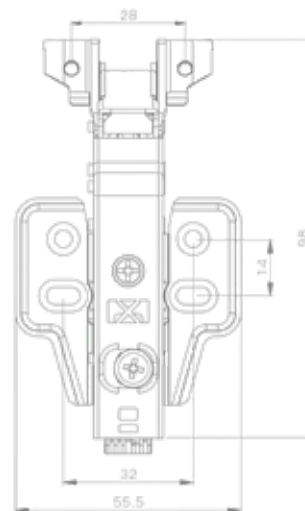

Item Code

Descriptions

11.K53-304-B4-OT

5/8" Stainless Steel 304 Soft Close Hinge, 4 Hole Mounting Plate