



NEUL®

GERMANY

Full Extension Synchronise Concealed Slides

Repeatedly Opening and Closing; Strict Inspection

80000次

Material/Lifetime

Double coated design to be more durable.

35KG Loading Capacity

Compact Structure

Galvanized Plate


Thickened Plate

Silent System

Ensure Sliding smoothly and gently

Screw Hole

Stable mounting

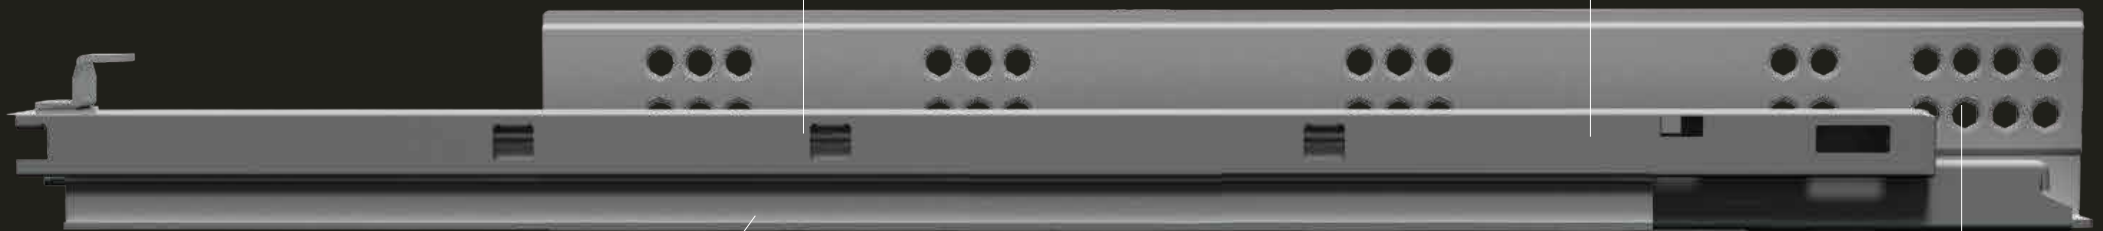

Full Extension Synchronise Concealed Slides

Repeatedly Opening and Closing; Strict Inspection



Damper

Double coated, three stage cylinder, durable and silent.



Material Thickness

Strengthen the rigidity and solidity to resist compression, abrasion and deformation.



Ball Bearings

Unique ball bearing structure to make slides more smooth and silent.



Roller

Ball bearing structure to make slides more smooth and silent.




Bumper Parts

Double coated design to be more durable.


Descriptions

- Loading Capacity : 35 kg
- Finish : Galvanized
- Length : 250 - 550mm
- Full Extension
- Easy assemble / remove


Hole Pattern

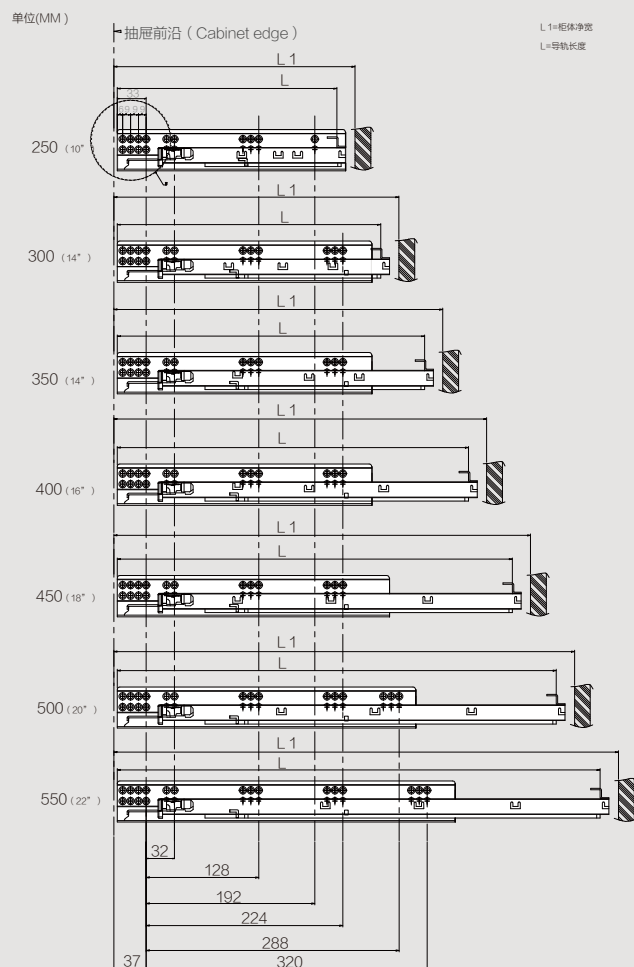


Direction

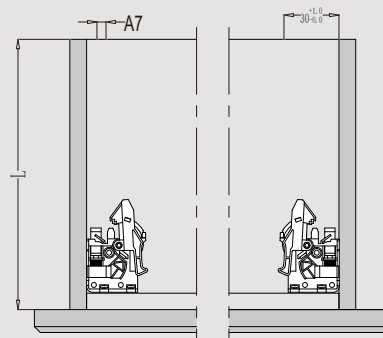


External Panel Drawer

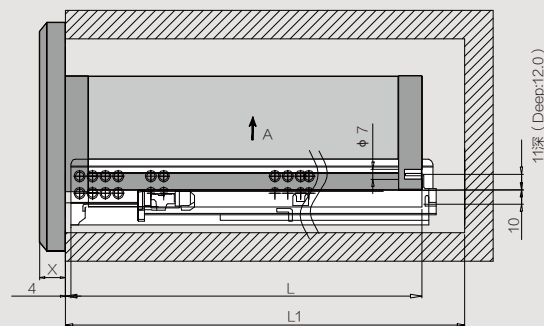


Drawer Installation Dimensions

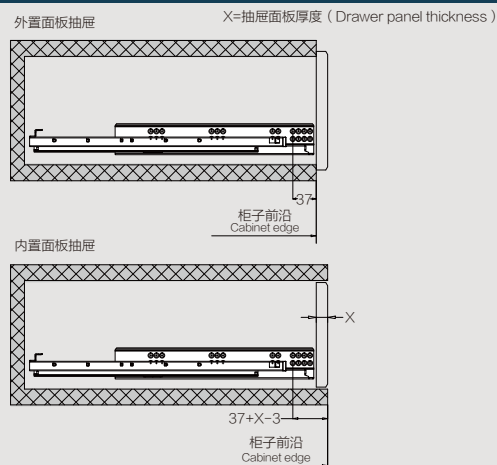

Rear Panel Dimensions

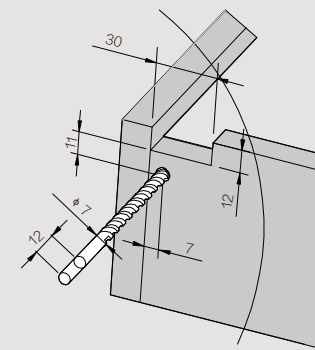


Internal Panel Drawer

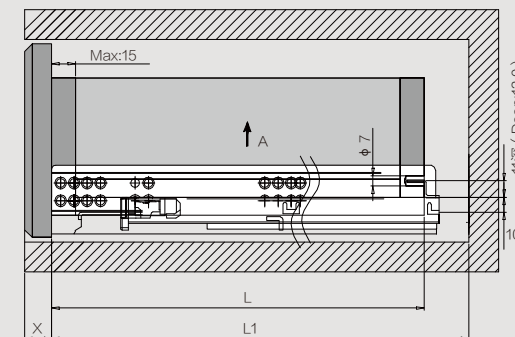

Installation Dimensions

SKW=抽屉宽度 (Internal Drawer Width) LW=柜子的内部宽度 (Internal Cabinet Width)

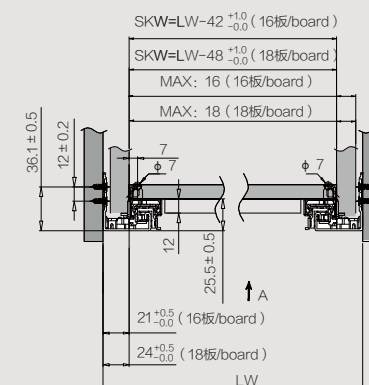

ORDER INFO.



order code	length (mm)		price (rm)
02.301SHD.TB.30	300 mm	12''	48.00 / pair
02.301SHD.TB.35	350 mm	14''	49.00 / pair
02.301SHD.TB.40	400 mm	16''	51.00 / pair
02.301SHD.TB.45	450 mm	18''	53.00 / pair
02.301SHD.TB.50	500 mm	20''	55.00 / pair
02.301SHD.TB.55	550 mm	22''	70.00 / pair