


K 53 - CLIP ON 304 STAINLESS STEEL HINGE

304 stainless steel full overlay hinge for wooden door

304
STAINLESS
STEEL

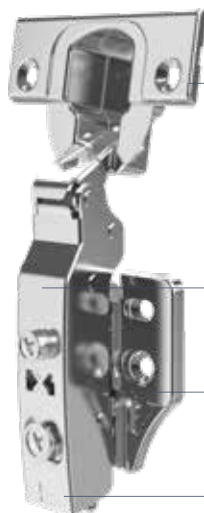

High quality stainless steel

can reach level 9 after 72 hours salt spray test

Hydraulic Damper

fully armed with copper damper and stainless steel bar

Design

new attractive aircraft shaped mounting plate

Easy Installation

providing strong fastening ABS buckle


K53 304 STAINLESS STEEL

TECHNICAL SPECIFICATIONS

Open Angle	: 103° - 105°	Quality Standard	: Grade 3 of EN15570
Diameter of Hinge Cup	: 35mm	Range of Door Thickness	: 15-25mm
Depth of Hinge Cup	: 12mm	Hinge Arm Material	: 1.0mm 304 stainless steel
Depth Adjustment	: -2.5mm/ +2.5mm	Hinge Cup Material	: 0.7mm 304 stainless steel
Base Adjustment	: -2.5mm/ +2.5mm	Hinge Plate Material	: 1.0mm 304 stainless steel

Hinge Cup Distance K	0	Door Panel Cover D					
		18	19	20	21	22	
3		0					
4			0				
5				0			
6					0		
7						0	
Base Height H							

	T =	16	17	18	19	20	21	22	23	24	25
K = 3	A =	0.5	0.7	1.1	1.3	1.5	2.2	2.8	3.3	3.8	4.3
K = 4	A =	0.5	0.7	1.1	1.3	1.5	2.1	2.7	3.2	3.7	4.2
K = 5	A =	0.5	0.7	1.0	1.2	1.5	2.0	2.5	3.0	3.5	4.0
K = 6	A =	0.5	0.7	0.9	1.1	1.5	1.7	2.2	2.7	3.2	3.7
K = 7	A =	0.5	0.7	0.8	1.1	1.5	1.7	2.2	2.7	3.2	3.7

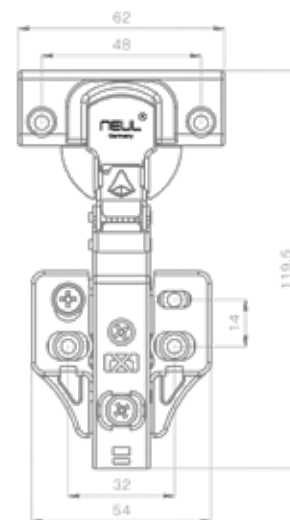

Item Code

Descriptions

11.K53-304-B4-OT

5/8" Stainless Steel 304 Soft Close Hinge, 4 Hole Mounting Plate